IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Audio Processor
Manufacturer: Cloud
Firmware Version: N/A
Model(s): CX462

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
3	4/15/2014	1.6.0	3.5.2	Fixed Input Level and Music Level command.
2	8/23/2013	1.6.0	3.5.1	Update Driver. Fixed Level Step commands. And input 6 select.
1	3/13/2013	1.5.1	3.3.2	Initial version.

Driver Notes:

Driver includes optimization to level

Control Commands & States:

Input	1 – 6	
Input Level	-90 to 0 in steps of 1	
Input Level (Step)	Up	Down
Master Input Mute	On	Off
Music level	-90 to 0 in steps of 1	
Music Level (Step)	Up	Down
Music Mute	On	Off
Mute Input 1 – 6	On	Off

Status Available:
N/A

MLC60 Series Supported Commands:

Input	1 – 6	
Input Level (Step)	Up	Down
Master Input Mute	On	Off
Music Level (Step)	Up	Down
Music Mute	On	Off
Mute Input 1 – 6	On	Off

Cable and Adapter Requirements:

M/F RS-232 DB9 Straight serial cable.

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	9600	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

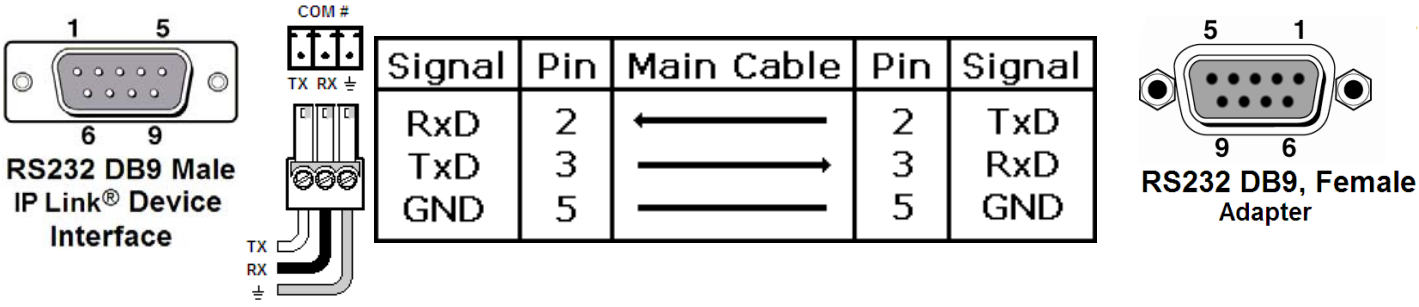

Note: Captive screw connector may also be used as a serial connection.

General Notes: